

One-cell Li-ion/Li-polymer battery protection IC

# MM3860 series

## Outline

MM3860 series are Li-ion battery protection IC and detect charge current / discharge current with high precision by current sensing resistor (Rsns). MM3860 have two step discharge overcurrent detection. And system is protected appropriately in the next 2 state, Normal discharge mode and large current discharge mode.

## Features

(Unless otherwise specified,Ta=25°C)

### 1) Range and accuracy of detection/release voltage

• Overcharge detection voltage	4.1V to 5.0V, 5mV steps	Accuracy±20mV
• Overdischarge detection voltage	2.1V to 3.0V, 50mV steps	Accuracy±35mV
• Discharging overcurrent detection voltage 1	+6mV to +50mV, 1mV steps	Accuracy±1mV
• Discharging overcurrent detection voltage 2	+10mV to +100mV, 1mV steps	Accuracy±2mV
• Charging overcurrent detection voltage	-50mV to -6mV, 1mV steps	Accuracy±1mV
• Short detection voltage	+30mV to +200mV, 10mV steps	Accuracy±5mV
• 0V battery charge inhibition battery voltage	0.9V fixed	Accuracy±300mV

### 2) 0V battery charge function

Selection from "Prohibition" or "Permission"


### 3) Low current consumption

• Normal mode	Typ. 2.5uA, Max.
• Stand-by mode	Max. 0.1uA (In case Overdischarge latch function Enable.)
	Max. 0.6uA (In c)


### 4) Package type


• SSON-6J/6M	1.40 × 1.40 × 0.55 [mm]
• SON-6C	1.60 × 2.00 × 0.55 [mm]
• SSON-6U/6V	1.40 × 1.80 × 0.40 [mm]







## Pin explanations

<b>SSON-6J/6M</b>	<b>Pin No.</b>	<b>Symbol</b>	<b>Function</b>
 1 2 3	1	VM	Charger negative voltage input terminal
	6	COUT	Charge FET control terminal
	5	DOUT	Discharge FET control terminal
	4	VSS	Negative power supply voltage input terminal
	5	VDD	Positive power supply voltage input terminal
	6	CS	Current detection terminal

<b>SON-6C</b>	<b>Pin No.</b>	<b>Symbol</b>	<b>Function</b>
 1 2 3	1	VM	Charger negative voltage input terminal
	6	COUT	Charge FET control terminal
	5	DOUT	Discharge FET control terminal
	4	VSS	Negative power supply voltage input terminal
	5	VDD	Positive power supply voltage input terminal
	6	CS	Current detection terminal

<b>SSON-6U/6V</b>	<b>Pin No.</b>	<b>Symbol</b>	<b>Function</b>
 1 2 3	1	VM	Charger negative voltage input terminal
	6	COUT	Charge FET control terminal
	5	DOUT	Discharge FET control terminal
	4	VSS	Negative power supply voltage input terminal
	5	VDD	Positive power supply voltage input terminal
	6	CS	Current detection terminal



## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply voltage	VDD	-0.3	12	V
VM terminal	VM	VDD-28	VDD+0.3	V
CS terminal	VCS	VSS-0.3	VDD+0.3	V
COUT terminal	VCOUT	VDD-28	VDD+0.3	V
DOUT terminal	VDOUT	VSS-0.3	VDD+0.3	V
Storage temperature	Tstg	-55	125	°C

## Recommended Operating Conditions


Parameter	Symbol	Min	Max	Unit
Operating ambient temperature	Topr	-40	85	°C
Operating voltage	Vop	1.5	5.5	V

## Electrical characteristics


(Unless otherwise specified, Ta=25°C)

Parameter	Symbol	Note	Min	Typ	Max	Unit
<b>Input/Output voltage</b>						
Maximum forbidden voltage for 0V charging	Vst	"Prohibition" function	0.6	0.9	1.2	V
Minimum operating voltage for 0V charging		"Permission" function	-	-	1.2	V
COUT L level output voltage	VcoL	ICOUT=30uA, VDD=4.5V	-	0.1	0.5	V
COUT H level output voltage	VcoH	ICOUT=-30uA, VDD=4.0V	VDD-0.5	VDD-0.1	-	V
DOUT L level output voltage	VdoL	IDOUT=30uA, VDD=2.0V	-	0.1	0.5	V
DOUT H level output voltage	VdoH	IDOUT=-30uA, VDD=4.0V	VDD-0.5	VDD-0.1	-	V
<b>Current consumption</b>						
Current consumption	Idd	VDD=4.0V, V-=0V	-	2.5	4.0	uA
Current consumption at stand-by	Is	Vdet2 = Vrel2	-	-	0.1	uA
		Vdet2 ≠ Vrel2	-	0.3	0.6	uA
<b>Detection/Release voltage</b>						
Overcharge detection voltage	Vdet1	Ta=+25°C	Typ-0.020	Vdet1	Typ+0.020	V
		Ta=-20~+60°C				
Overcharge release voltage	Vrel1		Typ-0.030	Vrel1	Typ+0.030	V
Overdischarge detection voltage	Vdet2		Typ-0.035	Vdet2	Typ+0.035	V
Overdischarge release voltage	Vrel2		Typ-0.065	Vrel2	Typ+0.090	V
Discharging overcurrent detection voltage 1	Vdet3-1		Typ-0.001	Vdet3-1	Typ+0.001	V
Discharging overcurrent detection voltage 2	Vdet3-2		Typ-0.002	Vdet3-2	Typ+0.002	V
Charging overcurrent detection voltage	Vdet4		Typ-0.001	Vdet4	Typ+0.001	V
Short detection voltage	Vshort		Typ-0.005	Vshort	Typ+0.005	V
<b>Detection delay time</b>						
Overcharge detection delay time	tVdet1		Typ*0.8	tVdet1	Typ*1.2	s
Overdischarge detection delay time	tVdet2		Typ*0.8	tVdet2	Typ*1.2	ms
Discharging overcurrent detection delay time 1	tVdet3-1		Typ*0.8	tVdet3-1	Typ*1.2	ms
Discharging overcurrent detection delay time 2	tVdet3-2		Typ*0.8	tVdet3-2	Typ*1.2	ms
Charging overcurrent detection delay time	tVdet4		Typ*0.8	tVdet4	Typ*1.2	ms
Short detection delay time	tVshort		Typ*0.7	tVshort	Typ*1.4	us

## Block diagram

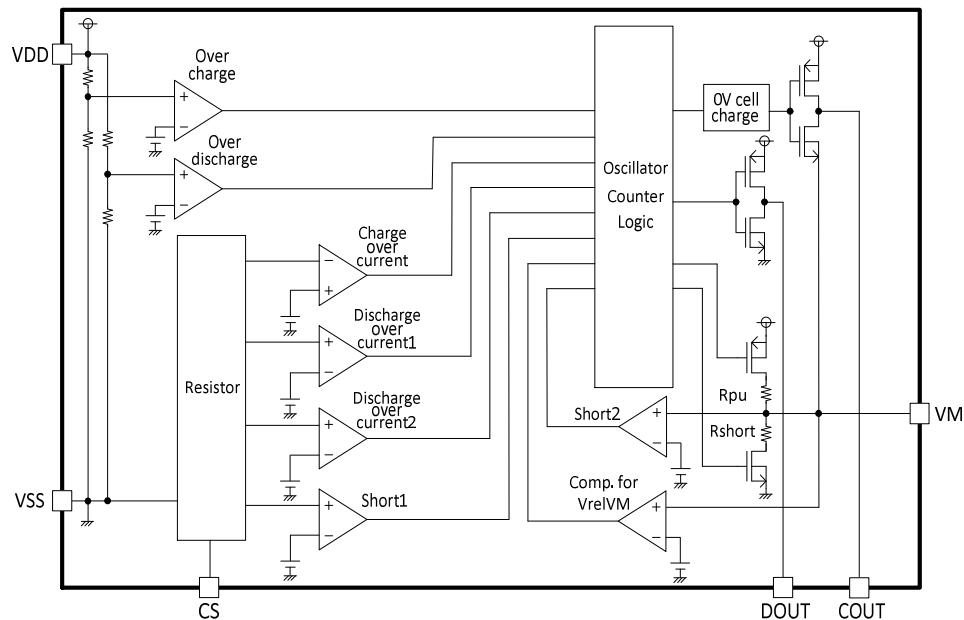

## Typical application circuit

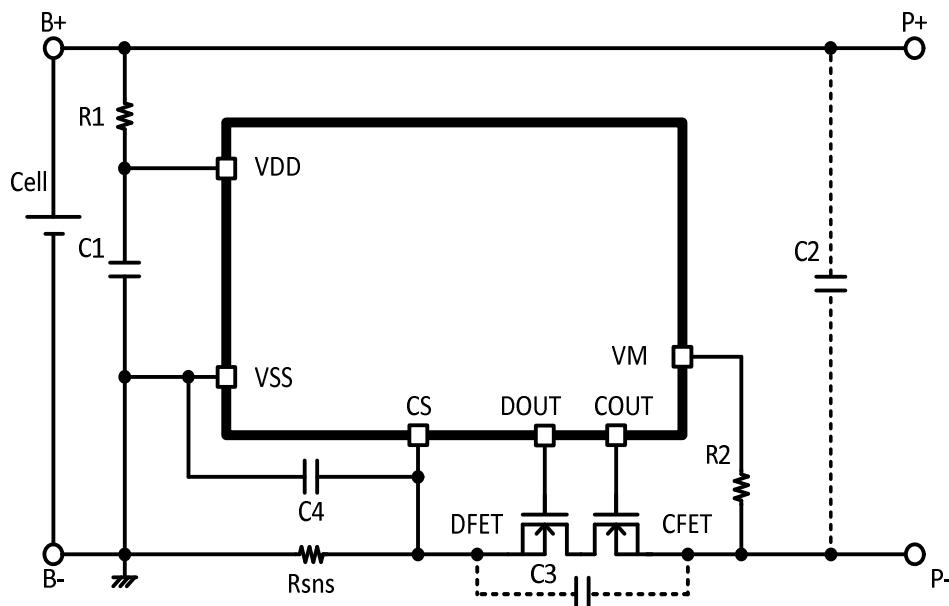

Symbol	Part	Min.	Typ.	Max.	Unit
R1	Resistor	-	100	1k	$\Omega$
C1	Capacitor	0.01	0.1	1.0	$\mu\text{F}$
R2	Resistor	-	1.0k	10k	$\Omega$
C2/C3/C4	Capacitor	-	0.1	-	$\mu\text{F}$

\* This typical application circuit and constant value do not guarantee proper operation. Please evaluate thoroughly by actual application to set up constants.