

04056DA

Server(Telecom)

2023/12/27

General Specifications

Motor Protection:Auto Restart / Polarity Protection

Insulation Resistance:10M ohm or over with a DC500V Megger

Dielectric Withstand Voltage:AC700V 1s

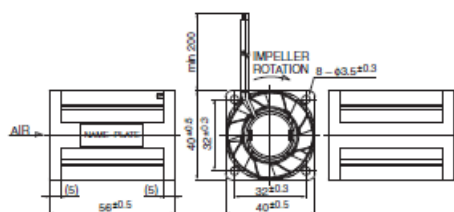
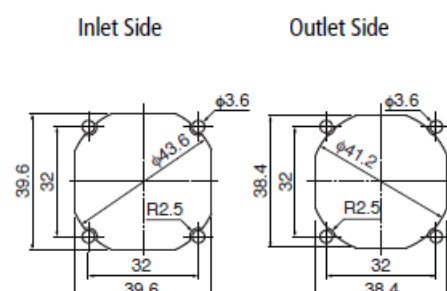
Allowable Ambient Temperature Range :-10deg.C - +70deg.C (Operating)

-40deg.C - +70deg.C (Storage)

non-condensing environment

Expected Life

40deg.C 70,000 Hours *Failure Rate 10% (L10 Life)

Outline**Panel Out-cuts**

ミネベアミツミ株式会社

Copyright©MinebeaMitsumi Inc. All right reserved.

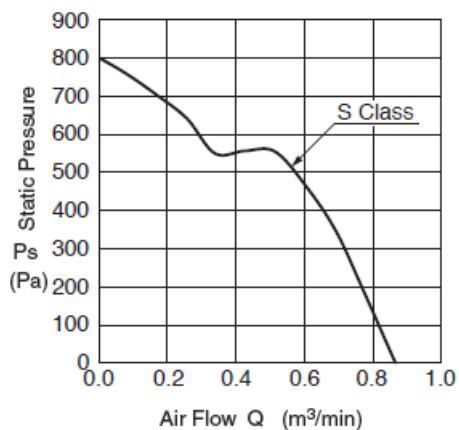
04056DA

Server(Telecom)

2023/12/27



Characteristic Curves



Material

Casing: Plastic (Black) UL94V-0

Impeller: Plastic (Black) UL94V-0

Bearing: Ball

BearingLead Wire: UL10368 AWG26 +: Red, -: Black

Specifications

Model	Product No	Nominal Voltage [V]	Operating Voltage lower limit [V]	Operating Voltage upper limit [V]	Current [A]	Input Power [W]
04056DA-12S-E1-00	00	12	10.8	13.2	1.05	12.60

Speed	Max. Air	Max. Air	Max. Static	Max. Static	Noise	Mass
-------	----------	----------	-------------	-------------	-------	------

04056DA

Server(Telecom)

2023/12/27

Model	[min-1]	Flow [m3/min]	Flow [CFM]	Pressure [Pa]	Pressure [In H2O]	NOISE [dB]	Mass [g]
04056DA-12S-E1-00	23000	0.86	30.40	800.0	3.21	63.0	62.0

Rotation: Clockwise as seen from the Fixed Blade side

Airflow Outlet: Fixed Blade side

*1: Average Values in Free Air