

08025DA(D-Type)

Server(Telecom)

2023/12/27

General Specifications




- Motor Protection: Auto Restart / Polarity Protection
- Insulation Resistance: 10M ohm or over with a DC500V Megger
- Dielectric Withstand Voltage: AC700V 1s
- Allowable Ambient Temperature Range : -10deg.C - +70deg.C (Operating)
- 40deg.C - +70deg.C (Storage)
- non-condensing environment


Expected Life

40deg.C 70,000 Hours *Failure Rate 10% (L10 Life)

Outline

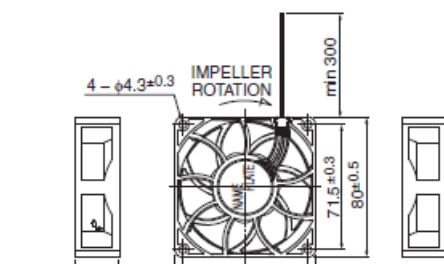

Panel Out-cuts

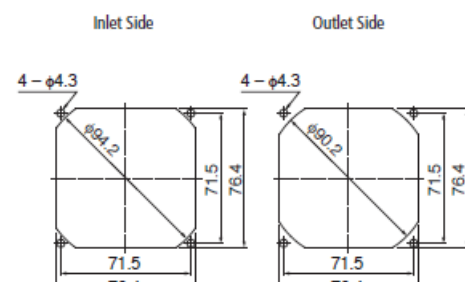


08025DA(D-Type)

Server(Telecom)

2023/12/27



Characteristic Curves

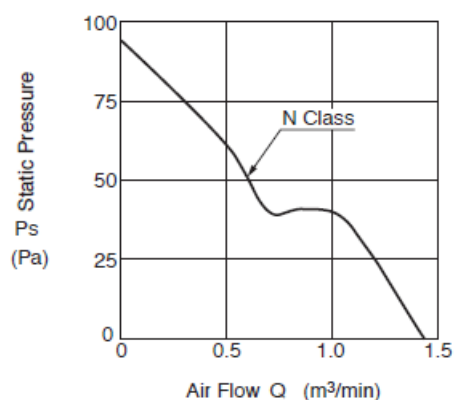

Material

Casing: Plastic (Black) UL94V-0

Impeller: Plastic (Black) UL94V-0

Bearing: Ball

Bearing Lead Wire: UL10368 AWG24 +: Red, -: Black

* Variable speed type is also available.

Please inquire regarding the other requirements.

* Customize service for IP compatible type and Oil-proof type is available for this item.

Please contact to our sales representative for more detail.

Specifications

08025DA(D-Type)

Server(Telecom)

2023/12/27

Model	Product No	Nominal Voltage [V]	Operating Voltage lower limit [V]	Operating Voltage upper limit [V]	Current [A]	Input Power [W]
08025DA-24N-AAD-00	00	24	18.0	26.4	0.11	2.60

Model	Speed [min-1]	Max. Air Flow [m3/min]	Max. Air Flow [CFM]	Max. Static Pressure [Pa]	Max. Static Pressure [In H2O]	Noise [dB]	Mass [g]
08025DA-24N-AAD-00	5250	1.40	49.50	94.0	0.37	42.0	135.0

Rotation: Clockwise as seen from the label side

Airflow Outlet: Label side

*1: Average Values in Free Air