

# 08038DA(E-Type Single Phase)

Server(Telecom)

2023/12/27

## General Specifications




- Motor Protection: Auto Restart / Polarity Protection
- Insulation Resistance: 10M ohm or over with a DC500V Megger
- Dielectric Withstand Voltage: AC700V 1s
- Allowable Ambient Temperature Range : -10deg.C - +70deg.C (Operating)  
 -40deg.C - +70deg.C (Storage)
- non-condensing environment


## Expected Life

40deg.C 70,000 Hours \*Failure Rate 10% (L10 Life)

## Outline

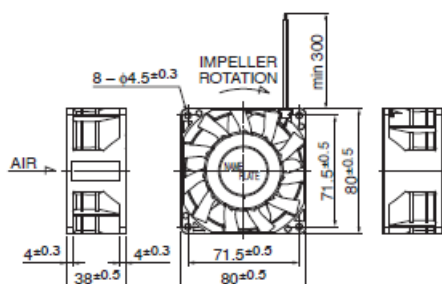

## Panel Out-cuts

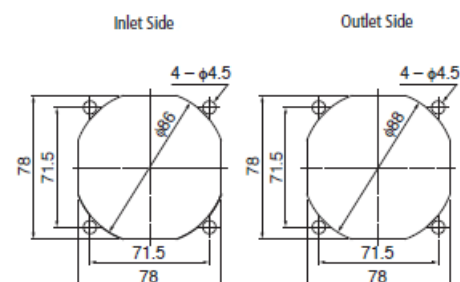


# 08038DA(E-Type Single Phase)

Server(Telecom)

2023/12/27

## Characteristic Curves

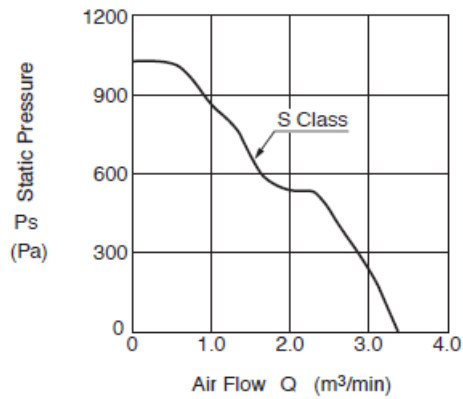

## Material

Casing: Plastic (Black) UL94V-0

Impeller: Plastic (Black) UL94V-0

Bearing: Ball

Bearing Lead Wire: UL3385 AWG20 +: Red, -: Black

\* Variable speed type is also available.

Please inquire regarding the other requirements.

## Specifications

Model	Product No	Nominal Voltage [V]	Operating Voltage lower limit [V]	Operating Voltage upper limit [V]	Current [A]	Input Power [W]

# 08038DA(E-Type Single Phase)

Server(Telecom)

2023/12/27

08038DA-12S-EAE-00	00	12	10.8	13.2	3.90	46.80	
Model	Speed [min-1]	Max. Air Flow [m3/min]	Max. Air Flow [CFM]	Max. Static Pressure [Pa]	Max. Static Pressure [In H2O]	Noise [dB]	Mass [g]
08038DA-12S-EAE-00	15000	3.35	118.50	1025.0	4.10	72.0	237.0

Rotation: Clockwise as seen from the label side

Airflow Outlet: Label side

\*1: Average Values in Free Air