

# 09232VA

Industrial

2023/12/27

## General Specifications




- Motor Protection: Auto Restart / Polarity Protection
- Insulation Resistance: 10M ohm or over with a DC500V Megger
- Dielectric Withstand Voltage: AC700V 1s
- Allowable Ambient Temperature Range : -10deg.C - +70deg.C (Operating)  
 -40deg.C - +70deg.C (Storage)
- non-condensing environment


## Expected Life

60deg.C 40,000 Hours \*Failure Rate 10% (L10 Life)

## Outline

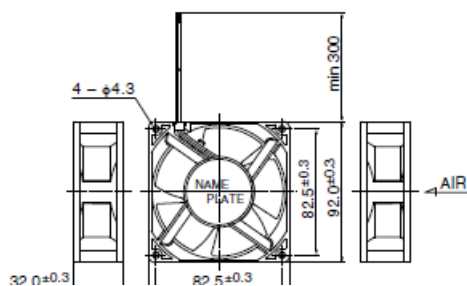

## Panel Out-cuts

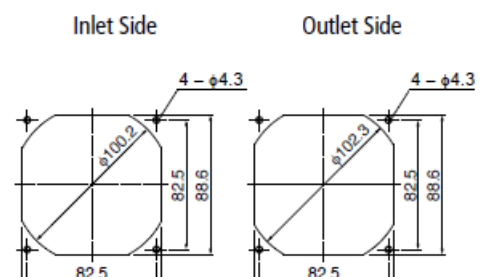


# 09232VA

Industrial

2023/12/27



## Characteristic Curves

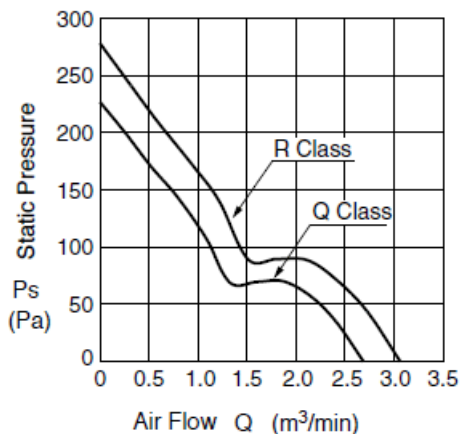

## Material

Casing: Plastic (Black) UL94V-0

Impeller: Plastic (Black) UL94V-0

Bearing: Ball

Bearing Lead Wire: UL3385 AWG24 +: Red, -: Black

\* Customize service for IP compatible type and Oil-proof type is available for this item.

Please contact to our sales representative for more detail.

## Specifications

Model	Product No	Nominal Voltage [V]	Operating Voltage lower limit [V]	Operating Voltage upper limit [V]	Current [A]	Input Power [W]
09232VA-24Q-AAS-	0	24	10.0	26.4	0.35	8.40

**09232VA**

Industrial

2023/12/27

0	0	24	10.0	26.4	0.50	12.00
---	---	----	------	------	------	-------

Model	Speed [min-1]	Max. Air Flow [m3/min]	Max. Air Flow [CFM]	Max. Static Pressure [Pa]	Max. Static Pressure [In H2O]	Noise [dB]	Mass [g]
09232VA-24Q- AAS-0	6200	2.60	91.80	225.0	0.90	56.0	200.0
09232VA-24R- AAS-0	7000	3.00	105.90	275.0	1.10	59.0	200.0

Rotation: Clockwise as seen from the label side

Airflow Outlet: Label side

\*1: Average Values in Free Air