

09238DA

Server(Telecom)

2023/12/27

General Specifications



Motor Protection: Auto Restart / Polarity Protection

Insulation Resistance: 10M ohm or over with a DC500V Megger

Dielectric Withstand Voltage: AC700V 1s

Allowable Ambient Temperature Range : -10deg.C - +60deg.C (Operating)

-40deg.C - +70deg.C (Storage)


non-condensing environment

Expected Life


40deg.C 70,000 Hours, Target Value *Failure Rate 10% (L10 Life)

60deg.C 40,000 Hours, Target Value *Failure Rate 10% (L10 Life)

Outline

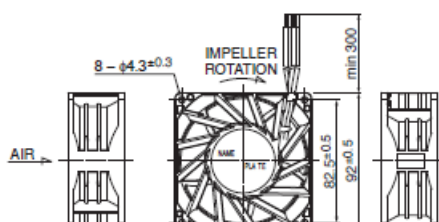


Panel Out-cuts

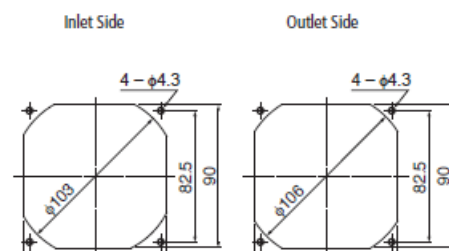

09238DA

Server(Telecom)

2023/12/27

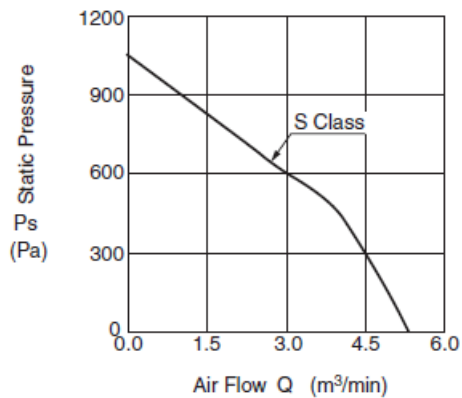**Characteristic Curves****Material**

Casing:Plastic (Black) UL94V-0

Impeller:Plastic (Black) UL94V-0

Bearing:Ball

Bearing Lead Wire:UL3385 or UL10368 AWG20+: Red, -: Black

Specifications

Model	Product No	Nominal Voltage [V]	Operating Voltage lower limit [V]	Operating Voltage upper limit [V]	Current [A]	Input Power [W]
09238DA-12S-E6E-0	0	12	10.8	13.2	5.80	69.60

09238DA

Server(Telecom)

2023/12/27

Model	Speed [min-1]	Max. Air Flow [m3/min]	Max. Air Flow [CFM]	Max. Static Pressure [Pa]	Max. Static Pressure [In H2O]	Noise [dB]	Mass [g]
09238DA-12S- E6E-0	15000	5.10	180.10	1050.0	4.21	77.0	264.0

Rotation: Clockwise as seen from the label side

Airflow Outlet: Label side

*1: Average Values in Free Air