

11338JE for Evaporator

Refrigerator

2023/12/27

General Specifications



Motor Protection: Auto Restart

Insulation Resistance: 10M ohm or over with a DC500V Megger

Dielectric Withstand Voltage: AC700V 1s

Allowable Ambient Temperature Range : -40deg.C - +40deg.C (Operating)


-40deg.C - +70deg.C (Storage)

non-condensing environment


Expected Life

-20deg.C 70,000 Hours *Failure Rate 10% (L10 Life)

Outline

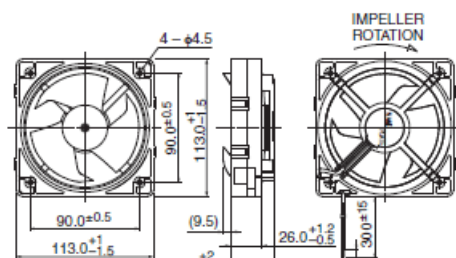

Panel Out-cuts




11338JE for Evaporator

Refrigerator

2023/12/27

36-1.5 | 51

Characteristic Curves

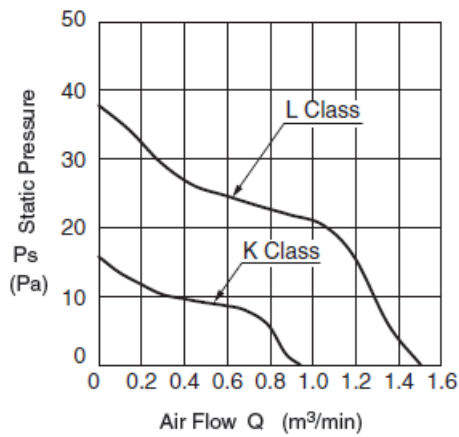

Material

Casing: Plastic (Black) UL94V-0

Impeller: Plastic (Green) UL94HB

Bearing: Ball

Bearing Lead Wire: UL1007 AWG26 +: Red, -: Black

Specifications

Model	Product No	Nominal Voltage [V]	Operating Voltage lower limit [V]	Operating Voltage upper limit [V]	Current [A]	Input Power [W]
11338JE-12K-BA-F0	F0	12	7.0	13.8	0.06	0.72
11338JE-12L-BA-F0	F0	12	7.0	13.8	0.13	1.56

11338JE for Evaporator

Refrigerator

2023/12/27

FU							
Model	Speed [min- 1]	Max. Air Flow [m3/min]	Max. Air Flow [CFM]	Max. Static Pressure [Pa]	Max. Static Pressure [In H2O]	Noise [dB]	Mass [g]
11338JE-12K- BA-F0	1920	0.94	33.20	15.9	0.06	21.5	170.0
11338JE-12L- BA-F0	2900	1.50	53.00	38.0	0.15	32.5	170.0

Rotation: Clockwise as seen from the label side

Airflow Outlet: Label side

*1: Average Values in Free Air