# Single-Chip System for Radios

## Monolithic IC LMF501

#### **Outline**

This is a monolithic IC designed for use as a single-chip AM radio. It can be used to configure an AM radio with few external components.

Vcc: 1.1V

It is ideal for use in watch radios, lighter-radios and other applications intended to operate on low voltage and current.

#### **Features**

- 1. Operation at low voltages possible
- 2. Operates with low current consumption
- 3. Compact, lightweight
- 4. Broad AGC range

### **Package**

TO-92A (LMF501T-2)

### Absolute Maximum Ratings

Item	Symbol	Ratings	Units
Operating temperature	Topr	-30~+80	$^{\circ}\! \mathbb{C}$
Storage temperature	Tstg	-40~+125	°C
Power supply current	Vcc	1.5	V


### Electrical Characteristics

Item	Symbol	Min.	Тур.	Max.	Units
Power supply voltage	Vcc		1.4		V
Operating output voltage	Vout	0.8		1.5	V
Circuit current	Icc		0.3		mA
Practical frequency range	fR	150		3000	kHz
Input resistance	Zin		4		ΜΩ
Audio distortion	THD		4		%
AGC range	AGC	30			dB
Power gain	Gp		70		dB


Measurement conditions: Except where noted otherwise, in measurement circuits1  $V_{\text{CC}}=1.4\ \text{V},\ \text{RAGC}=1.5\text{k}\Omega$ 

Modulator: f=1000Hz 40%, VIN=1m V/rms

### **Block Diagram**

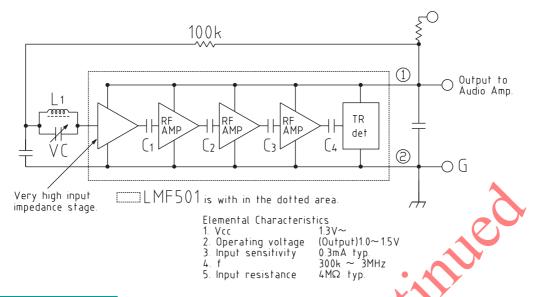

### Measurement Circuit

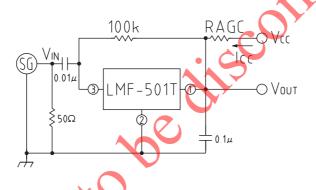

### **Application Circuits**

