


Flexible stop method mounting attachment FCA-CMM1/CMP1 series

2023/03/22

Features

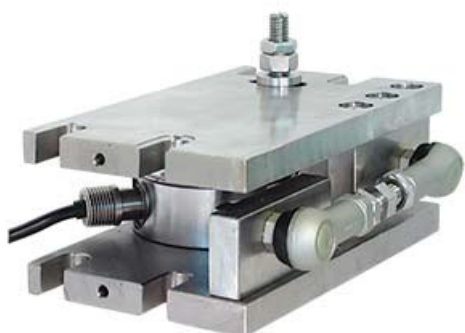

- For Tank or Hopper applications excellent when agitation is a problem

Specification

Specification name	Specification contents
Applicable load cell	CMM1/CMM1R/CMM1J-50K~2T, CMP1-250K~20T
Allowable horizontal moving length	±10 mm
Material	SUS304 or equivalent (Rod end is painted by stainless)
Accessories	Dummy load cell, Guide plate, Instruction manual

Item list

Item	Applicable load cell	Allowable horizontal load	Allowable horizontal load	Weight (Approx.) [kg]	Material	3D CAD files [STEP]

Flexible stop method mounting attachment FCA-CMM1/CMP1 series

2023/03/22

		[kN]	[mm]			
FCA-CMM1-50K/2T-S	CMM1/CMM1R/CMM1J-50K~2T	±11.77	±1.2	8	SUS304 or equivalent (Rod end is painted by stainless)	FCA-CMM1-50K-2T-S.STEP
FCA-CMP1-250K/2T-S	CMP1-250K~2T	±11.77	±1.2	8	SUS304 or equivalent (Rod end is painted by stainless)	FCA-CMP1-250K-2T-S.STEP
FCA-CMP1-5T-S	CMP1-5T	±29.42	±3	12	SUS304 or equivalent (Rod end is painted by stainless)	FCA-CMP1-5T-S.STEP
FCA-CMP1-10T-S	CMP1-10T	±58.84	±6	18	SUS304 or equivalent (Rod end is painted by stainless)	FCA-CMP1-10T-S.STEP
FCA-CMP1-20T-S	CMP1-20T	±117.7	±12	37	SUS304 or equivalent (Rod end is painted by stainless)	FCA-CMP1-20T-S.STEP

Item	CAD files[DXF]
FCA-CMM1-50K/2T-S	fca_cmm1_50k_2ts.dxf
FCA-CMP1-250K/2T-S	fca_cmp1_250k_2ts.dxf
FCA-CMP1-5T-S	fca_cmp1_5ts.dxf
FCA-CMP1-10T-S	fca_cmp1_10ts.dxf
FCA-CMP1-20T-S	fca_cmp1_20t_s.dxf

Options

Welding plate FCAW-*

Dummy load cell FCAD-*

Check rod for lift-off protection FCAR-*