

## PR5110

2022/07/01

## Features



- Serial communication means there is no display error relative to the indicator
- Selectable between board mounting types and wall/tabletop mounting types
- Up to 8 indicator units can be connected

## Specification

Specification name	Specification contents
Display	LC display, with backlight, 7 digits and decimal point, character height 18mm
Display unit	g , kg , t or lb
Power supply	100~240V AC
Power supply tolerance	-15%~10%
Maximum allowable power supply voltage	85~264V AC
Frequency	47~440Hz
Power consumption	<5VA
Operating temperature range	-10℃~60℃
Storage temperature range	-20℃~70℃
Interface	RS232/RS485

## Item list

ミネベアミツミ株式会社

Copyright©MinebeaMitsumi Inc. All right reserved.

## PR5110


2022/07/01

Parts No.	Connector	Housing	Housing materials	Class of protection	Weight [kg]
PR5110/00	2 x D-SUB 9pin ( male )	Panel housings	Aluminum	IP30 (Panel front IP65)	1
PR5110/10	Cable ground/internal terminal block	Tabletop housing	Stainless steel / Electrolytic polishing	IP65	1.4

Parts No.	Gross Weight [kg]	Specification sheet
PR5110/00	1.5	<a href="#">382PR5110.pdf</a>
PR5110/10	2.3	<a href="#">382PR5110.pdf</a>

## External view

## External Dimensions

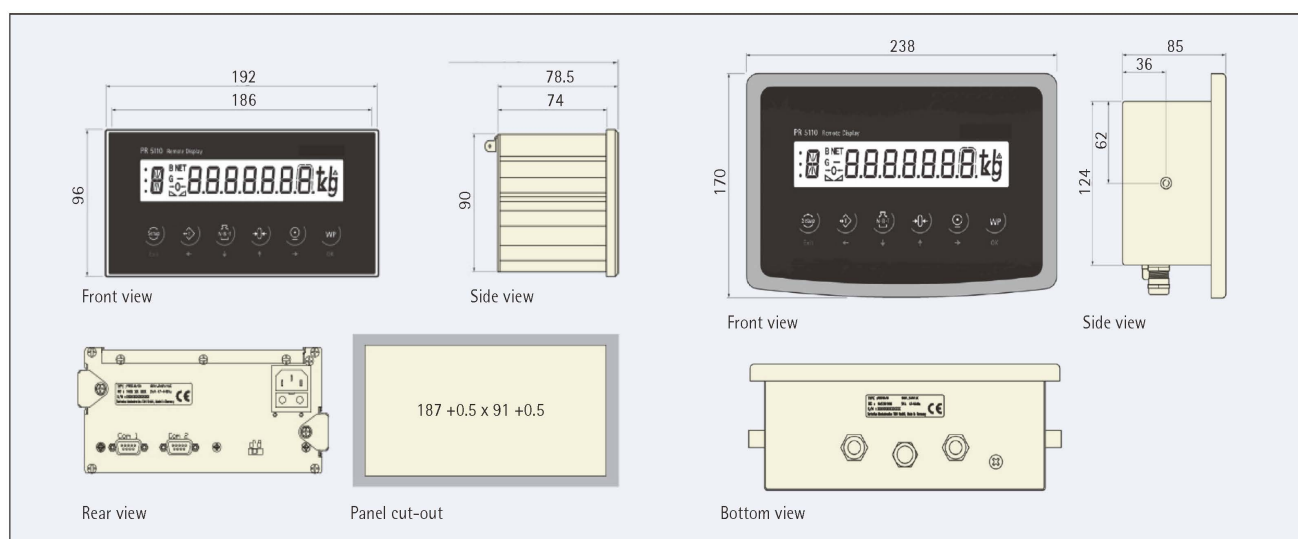

Dimensions in mm

[Click here to visit the website of Intec Germany.](#)