



2023/03/22

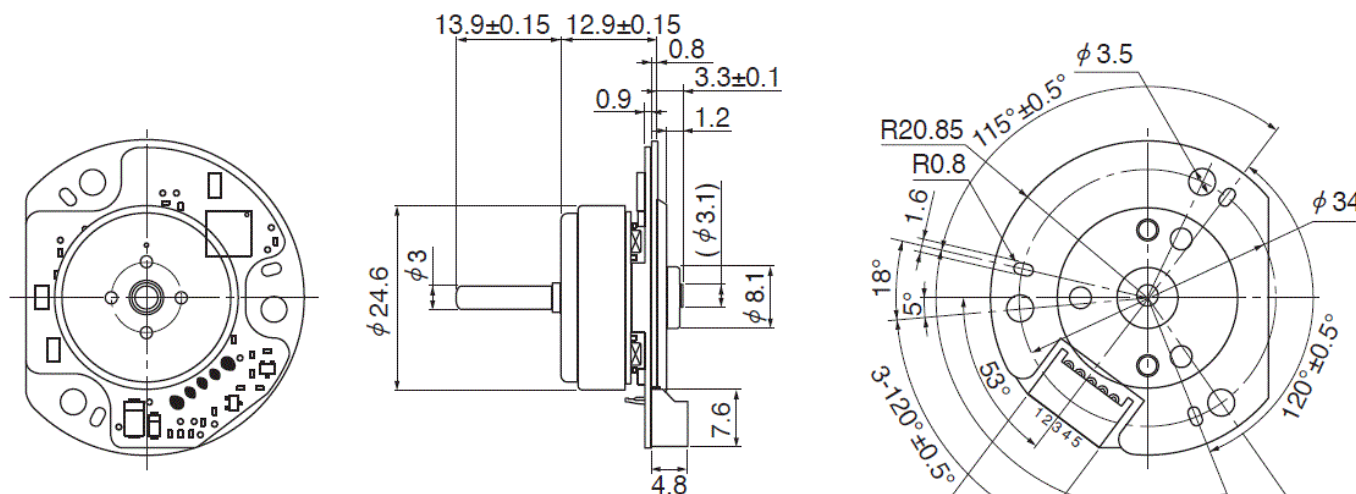

BML5 Hi speed type

2023/03/22



Specification

Outer Diameter [mm]	No load speed [r/min]	Starting torque [%]	Speed at maximal efficiency [r/min]	Continuous operation range
24.6	24000	67(at 10mN・m)	20000	<2A rms

* Major characteristic parameters at 12V.

Please contact our sales for detail specification & order lot QTY. (All custom product by customer's requirement)

Property diagram

