


A23KM(SZ Series)

2024/02/28




Specifications

Model	Outer Diameter [mm]	Length [mm]	Step Angle [°]	Drive Sequence	Rated Current [A]	Resistance [ohms]
A23KMK358CSB03	56.4	58.0	1.800	BI-POLAR	1.70	1.90
A23KMH049CSB03	56.4	63.0	1.800	BI-POLAR	3.00	0.90
A23KMH744CSB03	56.4	85.0	1.800	BI-POLAR	3.00	0.70

Model	Holding Torque [mN · m]	Inductance [mH]	Rotor Inertia [g · cm ²]	Detent Torque [mN · m]	Encoder Resolution [CPR]	Mass [g]
A23KMK358CSB03	800	7.8	180.0	29.0	4000	620
A23KMH049CSB03	1330	3.7	320.0	54.0	4000	710
A23KMH744CSB03	1800	2.8	490.0	93.0	4000	1150

Torque/Speed Characteristics

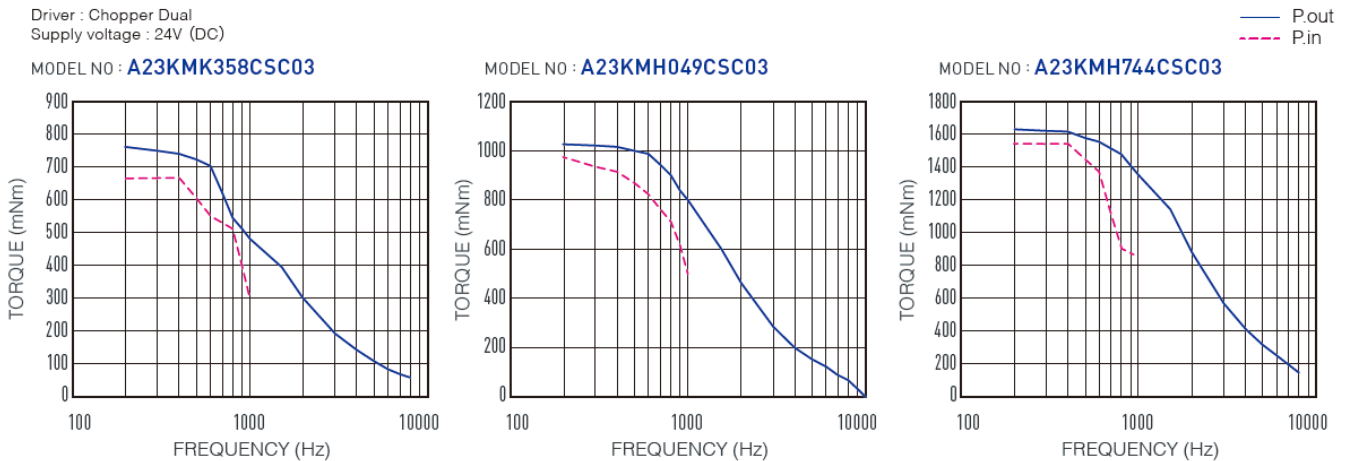

Case Studies

We can customize to meet your various requests! 【Stepping motors】