


SSU Series

2024/02/28

Features

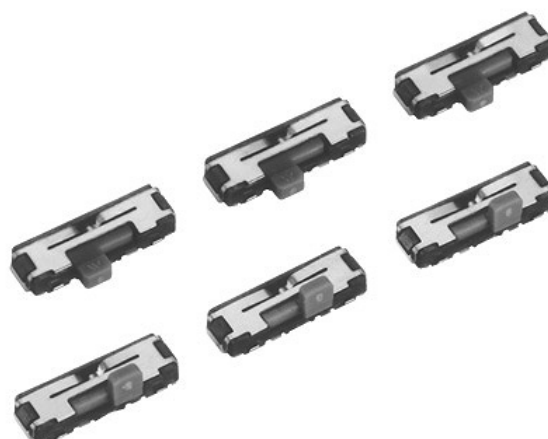

1. Small size (1-pole, 2-contacts : 6.8 x 2.0mm), so small mounting area.
2. Slim slide switch (1.2mm in height when installed).
3. Suitable for SMT reflow soldering.
4. Tape packaging supporting the auto mounting.
5. Travel length: 1.5mm.
6. Horizontal knobs (1-pole, 2-contacts) and vertical knobs (1-pole, 2-contacts) are available.

Application

1. For portable audios, remote controllers, DSC, video players, mobile phones, PDAs, etc.
2. For power switches, hold switches, mode select switches.

Specifications


Rating (Resistive load)	0.3A, 4V DC
Contact Resistance	1Ω or less
Insulation resistance	10MΩ or more

SSU Series


2024/02/28

witstand voltage	1 minute at 100V AC
Operating Force	1.5±1.0N
Life	10,000cycles
Pcs/Reel	SSU-121ART : 5,000 SSU-121BRT : 3,000

Overall View

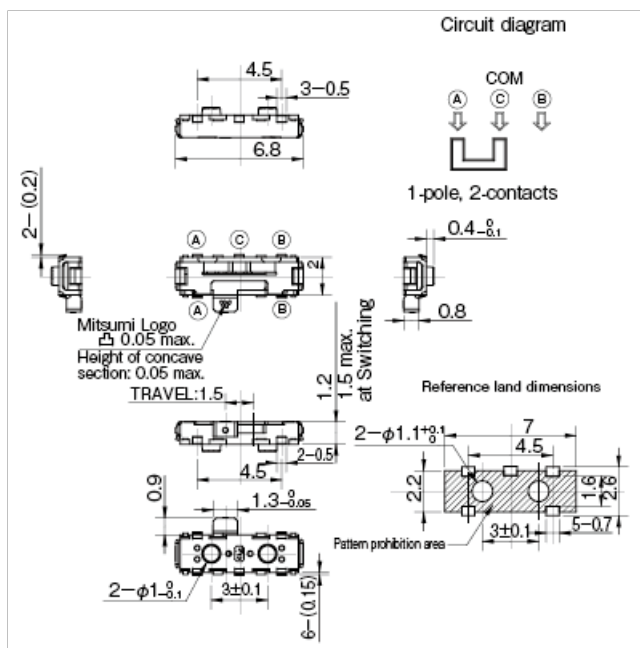


SSU-121ART

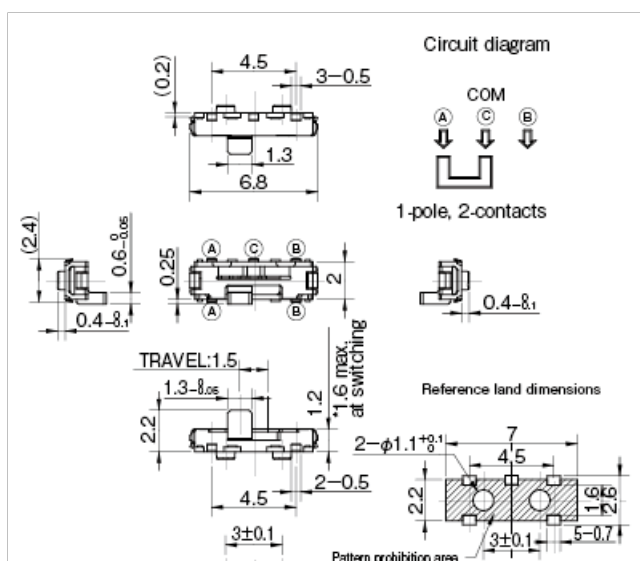

SSU Series

2024/02/28



SSU-121BRT

Unit:mm

NOTE

*Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.

*The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.