

Specifications

1.5 inch Back Light for DSC

LED : Nichia kagaku NSSW020A 1 LED


Prism sheet : T-Bef, Bef II

Test Conditions


Forward current : If=20mA (each LED)
 Measurement point : Center of each position where effective area was divided into nine
 Measurement direction : Front (0°)
 Environment : Windless in a darkroom, Temperature 25°C, Humidity 42%

Characteristics

Center luminance : 2,065cd/m² (typical)
 9 point AVG luminance : 1,858cd/m² (typical)
 Uniformity : 82% (typical)

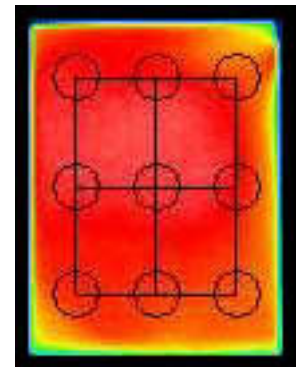

Dimensions

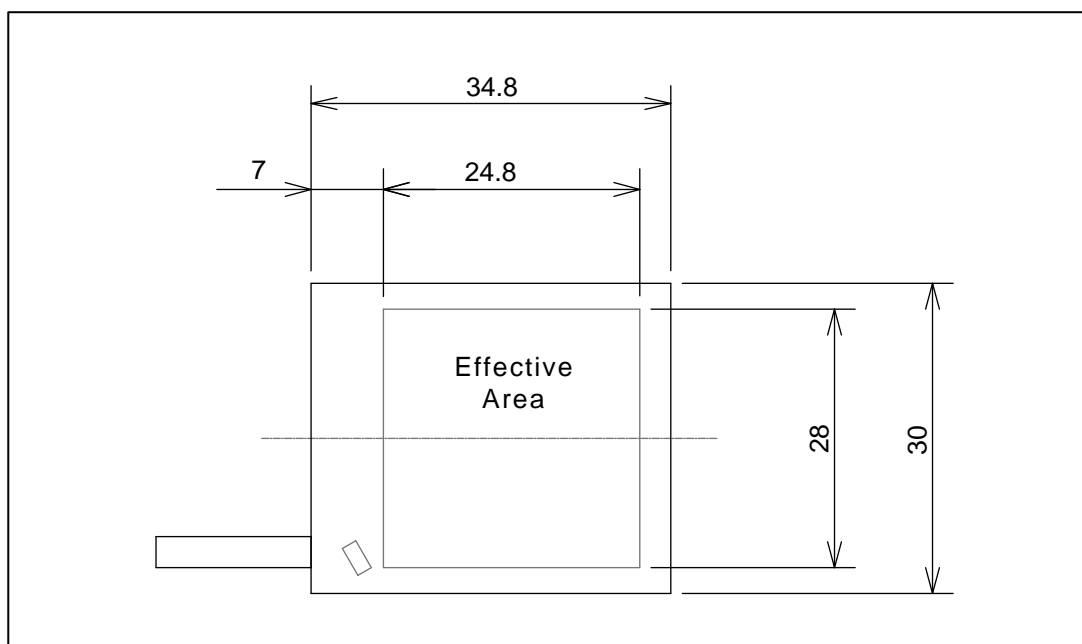

The figures provided above is for your reference only.
 Therefore, we does not warrant or guarantee the accuracy or timeliness of any information available here in. Design and specifications is subject to change without notice.