

## Specifications

### 2.0 inch Back Light for Cellular phone

LED : Nichia kagaku NESW008B 3 LEDs  
Prism sheet : T-Bef x 2


## Test Conditions

Forward current : If=15mA (each LED)  
Measurement point : Center of each position where effective area was divided into nine  
Measurement direction : Front (0°)  
Environment : Windless in a darkroom, Temperature 25°C, Humidity 42%


## Characteristics

Center luminance : 4,281cd/m<sup>2</sup> (typical)  
9 point AVG luminance : 4,031cd/m<sup>2</sup> (typical)  
Uniformity : 88% (typical)

LED	3,948	4,034	3,766
LED	4,228	4,281	3,865
LED	4,114	4,165	3,882

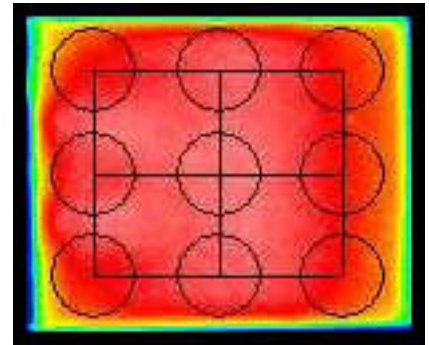

## Dimensions

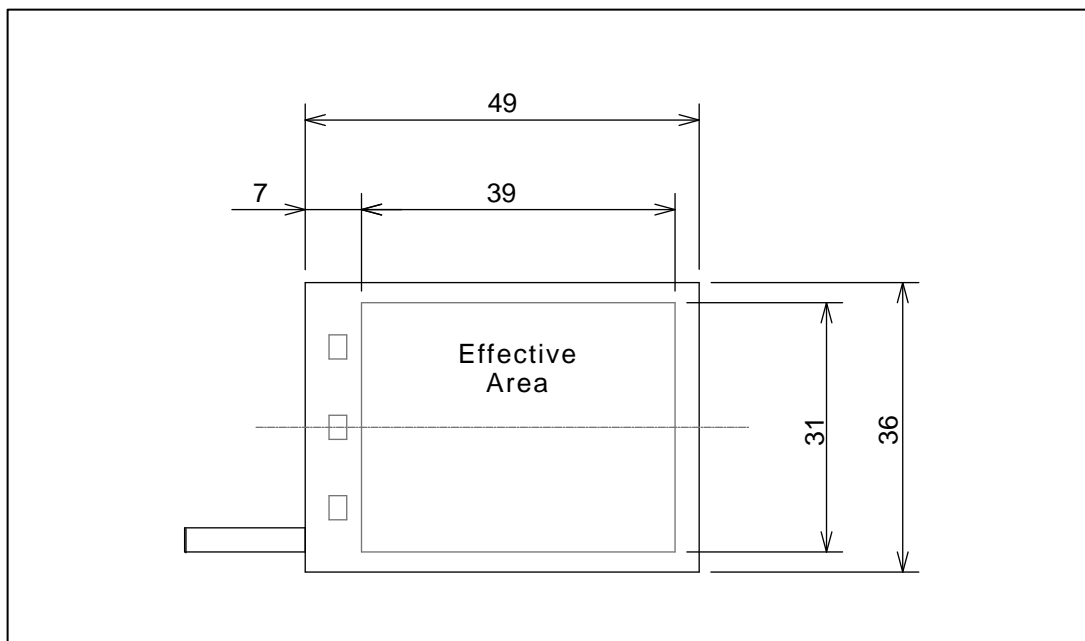

The figures provided above is for your reference only.  
Therefore, we does not warrant or guarantee the accuracy or timeliness of any information available here in. Design and specifications is subject to change without notice.