

Specifications

3.5 inch Back Light for PDA

LED : Nichia kagaku NESW008B 4 LEDs
Prism sheet : T-Bef, Bef II


Test Conditions

Forward current : If=20mA (each LED)
Measurement point : Center of each position where effective area was divided into nine
Measurement direction : Front (0°)
Environment : Windless in a darkroom, Temperature 25°C, Humidity 42%


Characteristics

Center luminance : 2,190cd/m² (typical)
9 point AVG luminance : 2,126cd/m² (typical)
Uniformity : 93% (typical)

LED	2,051	2,198	2,142
LED	2,068	2,190	2,169
LED	2,065	2,142	2,112

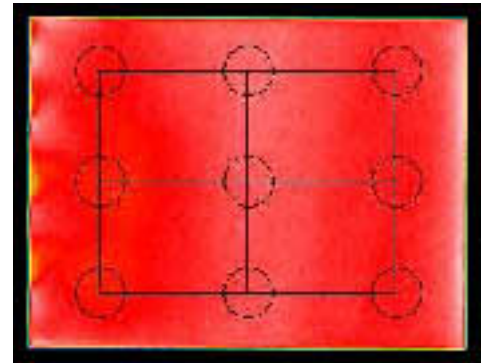

Dimensions

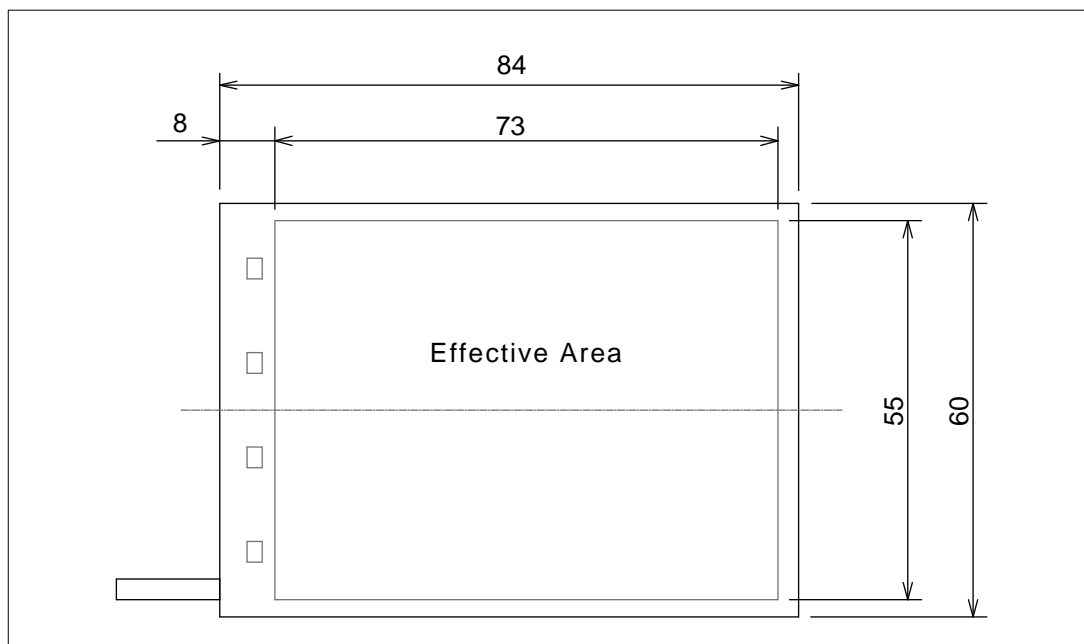

The figures provided above is for your reference only.
Therefore, we does not warrant or guarantee the accuracy or timeliness of any information available here in. Design and specifications is subject to change without notice.