

DNQ18MF (Fe Mg) for home appliances No Plate No Cover


2023/03/22

Overview



- dia. 61 DC Brushless motor outer rotor type
- Motor Type : 3 Phase DC Brushless Motor
- Direction of Rotation : CW and CCW
- Control-Driver circuit built-in.
- Compact, Light Weight and High Output
- High Efficiency
- Low Noise
- Overcurrent and Locked Rotor Protection

Overall View

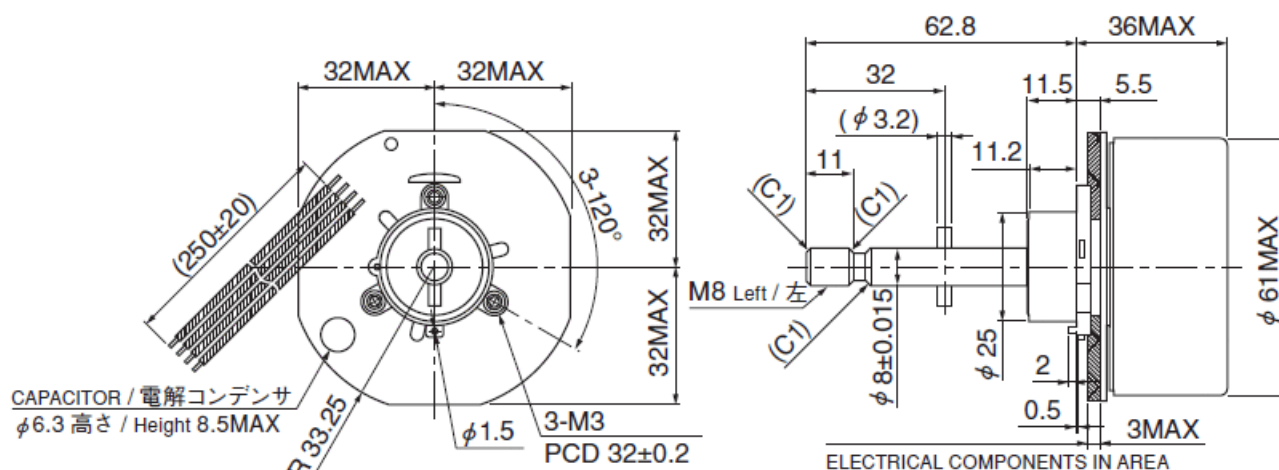

DNQ18MF (Fe Mg) for home appliances No Plate
No Cover

2023/03/22

4-1

DEPTH 4.5

電子部品実装領域
Except electrolytic capacitor
但し、電解コンデンサは除く

Specifications

Operating Voltage Min. [VDC]	21.6
Operating Voltage Nom. [VDC]	24
Operating Voltage Max. [VDC]	26.4
Operating Speed Min. [min-1]	200
Operating Speed Max. [min-1]	3000
Continuous Rating Power Max. [W]	30
Operating Temperature Min. [deg.C]	0
Operating Temperature Nom. [deg.C]	20
Operating Temperature Max. [deg.C]	50
Operating Humidity Min. [%RH]	15
Operating Humidity Max. [%RH]	90
Motor Weight Max. [g]	700

DNQ18MF (Fe Mg) for home appliances No Plate No Cover

2023/03/22

Property

