
# Overview



### **Overall View**

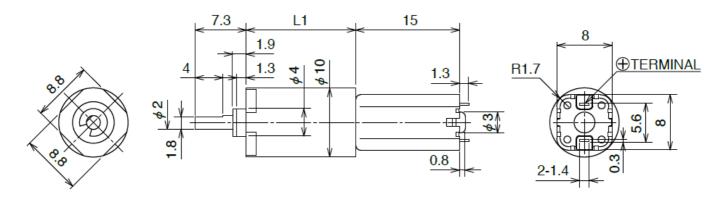

Unit:mm

## **Specifications**

Model	Rated Voltage [V]	No load speed [min-1]	No Load Current [mA]	Rated Load [gf·cm]	Rated Load [mN·m]	Rated Load Speed [min-1]
SG8G0NTY	4.5	66	48.0	101.00	10.00	59
SG8G0TTY	4.5	90	68.0	203.00	20.00	83


	Rated Load	Max Rated Load	Max Rated Load	Starting	Starting	Coor	Coon
Model	Current	Torque	Torque	Torque	Torque	Gear	Gear
Model	Current	Torque	rorque	Torque	Torque	Ratio	Step


2023/03/22

	[mA]	[gt·cm]	[mN·m]	[gf·cm]	[mN·m]			
SG8G0NTY	80	480.000	47.1	961.00	94.00	1:151	3	
SG8G0TTY	137	1162.000	114.0	2335.00	229.00	1:249	4	

Model	Gear Box L1 [mm]	Weight [g]
SG8G0NTY	15.9	11.8
SG8G0TTY	19.0	13.8

### **Characteristics**

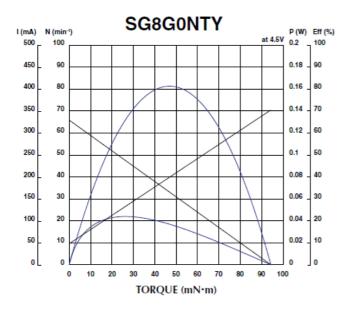

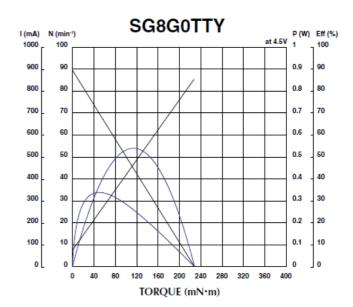

### **NOTE**

The final appearance shape and characteristics need to be discussed.

Depending on the required quantities, it might be difficult to accept the request.